

BINKS DX200-3

Air operated 3:1 diaphragm pump

FLUID HANDLING



Higher fluid pressure with constant low pulse flow rates

Durable construction, low maintenance operation

Interchangeable outlet options

Multiple spray gun, system and transfer applications



BINKS DX200-3 Air Operated 3:1 Ratio Diaphragm Pump

The DX200-3 is our new air operated 3:1 ratio, double diaphragm pump. It has been designed to perform in tough spray gun, system or transfer applications. A cutting-edge feature of this pump is the new Eazi-Swap outlet, which can be quickly configured as a standard outlet or adapted with our manual fluid regulator or active surge chamber options. The outlet can even be changed with the pump in-situ. This innovation provides the flexibility for connection to systems or direct to spray guns without the expense and complication of external components.



COATING TYPES AND APPLICATIONS

Suitable For These Materials:

- Solvent OR Waterborne Coatings
- Primers, Sealers & Catalysed Lacquers
- Moisture-Sensitive Materials
- UV-Cure Coatings
- Abrasive Coatings
- Adhesives & Fillers
- Plus many others...



High Performance, Low Running Costs

Consistent fluid delivery over the pressure range. High performance air valve for quick change-over. Leads to high volume of fluid output and lower air consumption than the competition.

Suitable For Piggable Systems

Low internal volume with no 'dead areas' makes the DX200-3 ideal for piggable systems.

Fast & Easy Servicing

Unobstructed access to critical components such as the air valves, diaphragms and check valves allow fast, easy maintenance.

Eazi-Swap Fluid Output

Outlet options can be ordered with the pump or retrofitted in-situ. Fluid Outlet can be rotated for front or rear fluid delivery.

Non-Stall & Quiet Running

Non-stall pilot mechanism and integrated muffler provides smooth, quiet running.


Universal Material Compatibility

Stainless Steel fluid passageways handle widest variety of materials.



DX200-3 Flushes with less

During tests, the DX200-3 was flushed out clean, without air and with measured solvent. The nearest competitor used 50cc's more solvent to flush.

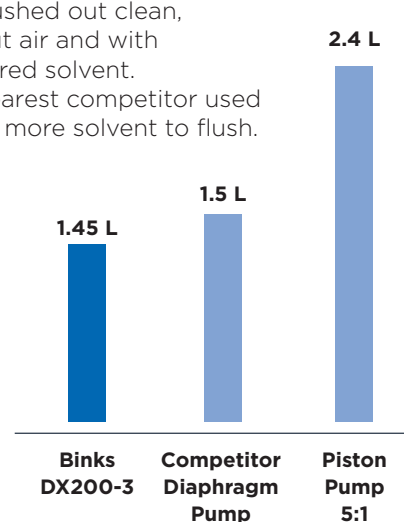


Easy To Maintain



Outstanding Performance

The DX200-3 was tested at a fluid pressure of 15 bar and a flow rate of 2 litres per minute against the main competition,

the DX200-3 had the quickest change-over period and least pressure loss of its rivals.

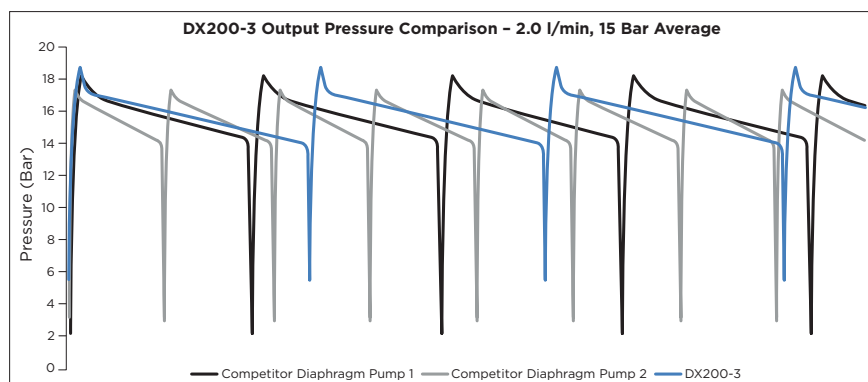

The 'longer—slower' cycle rate of the DX200-3 moves the same volume of fluid but at a slower cycle rate than its competitors. This means less stress and wear on components, resulting in longer intervals between maintenance inspections.

BINKS DX200-3 Air Operated 3:1 Ratio Diaphragm Pump

Pump Outfits

Save on costs and installation time by purchasing an Outfit. Our DX200-3 Outfits come complete with air regulators and suction hoses, plus a choice of mounting options and fluid outlets. The DX200-3 is also available as a Bare pump.

Fluid Filter Option

DX200-3 can be ordered with a filter (rated up to 21 bar) which can be secured



neatly against the pump's wall bracket, saving on installation time. The filter may also be ordered as an accessory item for retrofitting. This new inline filter gives superior flushing. Sanitary clamps enable quick disconnection of the filter housing for inspection and cleaning the screen. A bypass valve is included to enable easy priming of the pump. A 100 mesh filter screen is included as standard but alternative mesh sizes are available to suit the application. Sizes range from 15, through to 1250.

Mounting Options

DX200-3 can be supplied straight from the factory with either a wall mount bracket or a cart.

DX200 PUMP SPECIFICATION (BARE PUMP)

Ratio	3:1
Max Air Pressure	7.0 bar (100 psi)
Max Fluid Pressure	21 bar (305 psi)
Nominal Flow Volume / Cycle	0.14 Litres (0.037 US Gall)
Fluid Output @ 60 Cycles/Min	8.4 Litres / min (2.2 US Gall /min)
Max Recommended Continuous Cycle Rate	25 Cycles /min
Max Recommended Intermittent Cycle Rate	40 Cycles /min
Inlet Fluid Connection	1/2" BSPP Female
Outlet Fluid Connection	1/2" BSPP Female
Maximum Dry/Wet Lift (Head)	6.9 m (22.6 ft) / 8.7 m (28.5 ft)
Air Inlet	1/4" Universal (BSPP/NPSM) Female
Air Volume / cycle @ 6.9Bar/100psi	5.0l (0.18 SCFM)
Air Flow @ 10 cycles / min 6.9Bar/100psi	47.8l (1.69 SCFM)
Air Flow @ 30 cycles / min 6.9Bar/100psi	156.9l (5.54 SCFM)
Air Quality ISO 8573.1 Class 3,3,2 #	Dirt 5 microns
	Water -20°C @ 7 Bar (940 ppm)
	Oil 0.1mg/m ³
	Non Lubricated
Noise Level	79.8 dBA
Weight - Bare Pump	17.9 Kg (39.4 lbs)
Temperature Range	0 - 40 °C (32 - 104 °F)
Dimensions (W x H x D)	193mm (7.6") x 262mm (10.35") x 264mm (10.4")

DX200-3 ORDERING INFORMATION

Bare Pump		Outfit (No Gun & Hoses)			
DX200-3S	A - B	DX200-3S	A	1 - C	D
A	Outlet Option	B	Air Regulators		
N	= No Regulator	= No Regulator	Unregulated N/A on outfits		
M	= With Manual Regulator	1	= 1 Regulator	DX200-3SN or SM only	
P	= Active Surge Chamber				
C	Mounting Type	D	Options		
W	= Wall	= No Option	Unregulated N/A on outfits		
C	= Cart	F	= Filter		

FILTER SCREENS

Description	Part Number
100 Mesh Kit x 3 (150 Micron)	194549-K3
100 Mesh Kit x 12 (150 Micron)	194549-K12
200 Mesh Kit x 3 (75 Micron)	194551-K3
60 Mesh Kit x 3 (250 Micron)	194548-K3
30 Mesh Kit x 3 (595 Micron)	194547-K3

Other sizes are available

ACCESSORIES

Description	Part Number
Manual Fluid Regulator	DXK-274
Active Surge Chamber	DXA-SC31P
Active Surge Chamber Air Reservoir	DXA-SCR1.0
Non Regulated Outlet	DXK-279
Fluid Filter	DXA-F6ME100-200-3
1/2" Suction Hose	DXA-S25-S13-ME15



Binks DX Series 5-Year Warranty

Binks® warrants to the original end-use purchaser that the Binks branded products "DX" shall not fail under normal use and service due to a defect in material or workmanship within five (5) years from the date of shipment from Binks. Does not include normal wear and tear parts.

For further technical information refer to the Binks DX200 Diaphragm Pump Service Bulletins.



SOLUTIONS FOR YOUR WORLD

www.carlisleft.com

World Class Manufacturers of: | Process Controls | Curing & Conveying
Electrostatics | Fluid Handling | Powder Coating | Atomisation

Carlisle Fluid Technologies UK
Ringwood Road, Bournemouth, Dorset
England BH11 9LH

Tel: +44 (0)1202 571111
Fax: +44 (0)1202 573488
Email: marketing-uk@CarlisleFT.eu